Downloaded from www.vandenborre.be

X-mini™ Capsule Speaker

INSTRUCTION MANUAL

X-MINI™ MAX-S

MINIMUM SIZE. MAXIMUM SOUND.

X-mini™ Max-S

INTRODUCTION

Congratulations on your purchase of the X-mini™ Max-S Stereo Capsule Speaker. The X-mini™ Max-S is a revolutionary portable audio technology; it is the first pocketsize stereo speakers with a pair of built-in bass support and rechargeable batteries. The design consists of a patented vacuum bellow that mimics the resonance of a subwoofer, and equipped with a pair of high-fidelity speakers to ensure smooth delivery of the mid-highs.

CAUTION
Please read manual before using product

Safety Rules

- Please follow the rules depicted in this manual closely to ensure your safety. Before using the speaker, we would strongly encourage you to read through this user manual.
- Be more wary of any edges, uneven surfaces, metal parts, accessories and its packaging so as to prevent any possible injury or damage.
- Keep this speaker out of reach of children. Take note that this speaker is not edible and should not be placed in your mouth.
- Do not modify, repair or dismantle the speaker. Doing so may result in fires, electric shocks, complete breakdown of the speaker, etc. All of which, are not covered under warranty.
- Do not use any diluents or volatile liquid to clean the speaker. Keep in mind that the surface of the speaker should only be wiped with a clean dry cloth.
- Do not use this speaker in locations whereby there are high-temperatures or high humidity levels (For instance, bathrooms); ideally, the speaker should be used in a location free of dust and exposure to direct sunlight.
- Do not insert foreign objects, such as pins, into this speaker.
- Do not touch this speaker when your hands are wet as this may result in electric shocks.
- Turn down the volume before/while using this speaker as sudden loud sounds may damage it.
- Refrain from dropping the speaker as well as any collision with other objects.
- Do not use this speaker when in hazardous locations.
- Should any abnormal situations or problems occur while using the speaker, discontinue use of speaker immediately.

X-mini™ Max-S

PACKAGE CONTENTS

The package will contain the following:

- 1 x X-mini™ Max-S
- 1 x User Manual
- 1 x Audio union cable
- 1 x Protection Pouch
- 1 x Charge/Connector Cable

USER MANUAL

X-MINI™ MAX-S

BLACK POUCH



CHARGE/CONNECTOR CABLE

AUDIO CABLE

X-mini™ Max-S

DIAGRAM

CAPSULE MODE



SPEAKER MODE



X-mini™ Max-S

MODE OF USAGE

CAPSULE MODE

The X-mini Max speakers can be connected at the bottom by a magnetic base to form the Capsule Mode for easy storage and increased portability.

SPEAKER MODE

Separate the speakers from each other by gently pulling each speaker apart from the Capsule Mode.

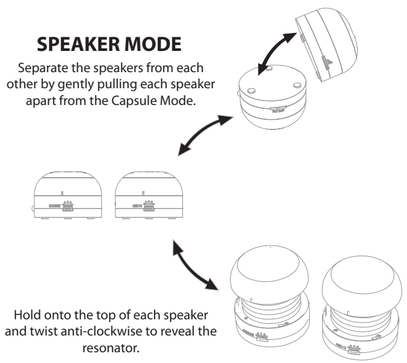

Hold onto the top of each speaker and twist anti-clockwise to reveal the resonator.

X-mini™ Max-S

CONNECTION DIAGRAM

Connection:

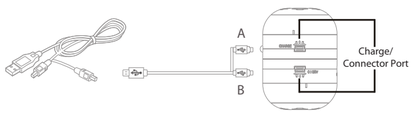

1. Connect the mini USB jacks from charge/ connector cable (A) & (B) to the connector ports on both units.

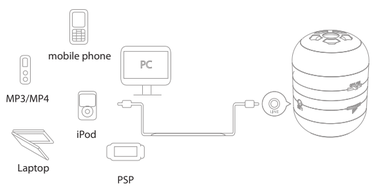

2. Connect one side of the 3.5mm jack from the audio cable to any audio playback device, and the other end into the audio port.

X-mini™ Max-S

CHARGING

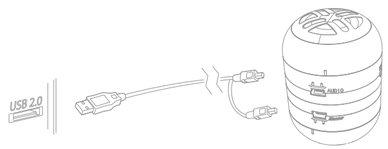

USB OUTLET | Charge/Connector Cable | X-MINI™ MAX-S

1. The X-mini™ Max-S is rechargeable via Standard USB type A interface connects to all PC USB ports and safety certified AC adaptors.
2. Connect one of the mini USB jack from the charge/connector cable into the connector port of the unit with the LED
3. The LED on the X-mini™ Max-S will turn Red during charging.
4. The LED will turn into Blue once the battery is fully charged.
5. General charging time is between 2 to 3 hours.

LED INDICATOR			
When Charging		When in Use	
Blue	X-mini fully charged	Blue	X-mini is on
Red	X-mini is charging	Blue (Dim)	Battery Low

X-mini™ Max-S

TECHNICAL SPECIFICATIONS

X-MINI™ MAX-S SPEAKER
Net weight: 100g
size: 52MM×52MM ×70MM（Closed resonator）
Speaker: MAGNETISM PREVENT D36/（4Ω）/3W
Loudspeaker output: <3.5W
Rating power: 1.7W×2(2.8W×2 Input DC5V)
Frequency response: 230HZ-18KHZ
lithium battery Voltage: 4.2V
Signal-to-Noise: 86db

BATTERY
lithium battery capacity: 280MAH
lithium battery charging Voltage: 5V/+0.5V

CERTIFICATE

CE

Declaration of Conformity

X-mini™ Max-S Capsule Speakers

EC-Declaration of Conformity to the essential requirements of the
applicable 89/336/EEC as last amended by EC Directive 93/68/EEC

We, XM-I, declare under our sole responsibility as authorized representative that the following product

Brand Name:	XM-I
Model Name:	X-mini™ Max-S Capsule Speaker
Model No.:	XAM2-S

Is fully in conformity with the essential requirement of the European Council Directive 93/68/EEC.
This declaration is based on the full compliance of the product with the following European standards:

EN 55022: 1998 + A1: 2000 + A2: 2003
EN 55024: 1998 + A1: 2001 + A2: 2003

www.x-mini.com

Next Generation Technology

Product designed in Singapore
Manufactured in China
Manual printed in China